

LF 3000® Push-In Fittings

The LF 3000® range, with its wide variety of shapes and configurations, allows you to find **the perfect product to meet your needs** and thus **optimise the use** of your equipment.

Product Advantages

World-Class Performance

- 40 years of expertise
- Full bore for optimum flow
- Ideal for vacuum or pressure applications
- Automatic sealing guaranteed, in both static and dynamic applications
- Materials with high resistance
- Durability of product and equipment

Optimal Design

- 100% leak-tested in production
- Date coding to guarantee quality and traceability
- Compact and aesthetic design: reduced dimensions for space-saving
- Tube fixed during connection, preventing leakage
- Conforms to ISO 14743
- Excellent vacuum performance thanks to the patented sealing technology
- Lightweight: reduced energy consumption of operating systems
- Parallel threaded fitting with a patented captive O-ring seal
- Maximum flexibility due to the wide product range



- Robotics
- Automotive Process
- Pneumatics
- Semi-Conductors
- Textile
- Packaging
- Vacuum

Applications


Technical Characteristics

Compatible Fluids	Compressed air Other fluids: please consult us
Working Pressure	Vacuum to 20 bar
Working Temperature	-20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials

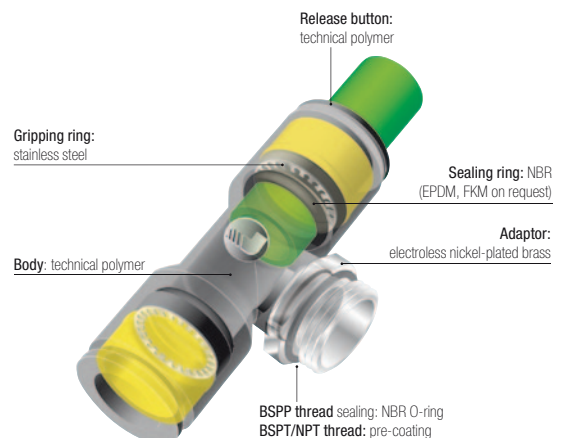

Silicone-free


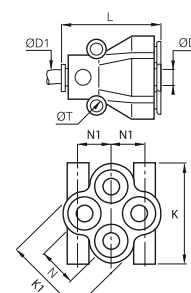

Regulations

ISO 14743: Pneumatic fluid power, push-in connectors for thermoplastic tubes
DI: 97/23/EC (PED)




DI: 2002/95/EC (RoHS), 2011/65/EC
DI: 1907/2006 (REACH)

Multiple Fittings




3144 Equal and Unequal Multiple Y Piece

	<p>Technical polymer, NBR</p> 	<p>ØD ØD1 </p>	<p>K K1 L N N1 ØT kg</p>																																			
		<table border="1"> <tr> <td rowspan="2">4</td> <td>4</td> <td>3144 04 04</td> <td>25.5</td> <td>21</td> <td>30.5</td> <td>10</td> <td>8.5</td> <td>3.7</td> <td>0.015</td> </tr> <tr> <td>6</td> <td>3144 04 06</td> <td>26</td> <td>21</td> <td>30.5</td> <td>10</td> <td>10</td> <td>3.7</td> <td>0.013</td> </tr> <tr> <td rowspan="2">6</td> <td>6</td> <td>3144 06 06</td> <td>31.5</td> <td>26.5</td> <td>37.5</td> <td>12</td> <td>8.5</td> <td>3.7</td> <td>0.034</td> </tr> <tr> <td>8</td> <td>3144 06 08</td> <td>31.5</td> <td>26.5</td> <td>38</td> <td>12</td> <td>10</td> <td>3.7</td> <td>0.026</td> </tr> </table>	4	4	3144 04 04	25.5	21	30.5	10	8.5	3.7	0.015	6	3144 04 06	26	21	30.5	10	10	3.7	0.013	6	6	3144 06 06	31.5	26.5	37.5	12	8.5	3.7	0.034	8	3144 06 08	31.5	26.5	38	12	10
4	4	3144 04 04		25.5	21	30.5	10	8.5	3.7	0.015																												
	6	3144 04 06	26	21	30.5	10	10	3.7	0.013																													
6	6	3144 06 06	31.5	26.5	37.5	12	8.5	3.7	0.034																													
	8	3144 06 08	31.5	26.5	38	12	10	3.7	0.026																													


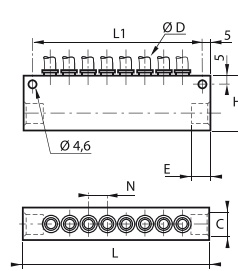

3304 Multiple Tee

	<p>Technical polymer, NBR</p> 	<p>ØD1 ØD2 </p>	<p>H L L/2 N ØT kg</p>																																								
		<table border="1"> <tr> <td rowspan="2">6</td> <td>4</td> <td>3304 06 04</td> <td>24.5</td> <td>34</td> <td>37</td> <td>11.5</td> <td>4.2</td> <td>0.015</td> </tr> <tr> <td>8</td> <td>3304 08 04</td> <td>24.5</td> <td>34</td> <td>37</td> <td>11.5</td> <td>4.2</td> <td>0.012</td> </tr> <tr> <td rowspan="2">8</td> <td>6</td> <td>3304 08 06</td> <td>24.5</td> <td>34</td> <td>37</td> <td>11.5</td> <td>4.2</td> <td>0.010</td> </tr> <tr> <td>10</td> <td>3304 10 06</td> <td>36</td> <td>44</td> <td>40.5</td> <td>14.5</td> <td>4.2</td> <td>0.019</td> </tr> <tr> <td>10</td> <td>8</td> <td>3304 10 08</td> <td>36</td> <td>44</td> <td>40.5</td> <td>15.5</td> <td>4.2</td> <td>0.015</td> </tr> </table>	6	4	3304 06 04	24.5	34	37	11.5	4.2	0.015	8	3304 08 04	24.5	34	37	11.5	4.2	0.012	8	6	3304 08 06	24.5	34	37	11.5	4.2	0.010	10	3304 10 06	36	44	40.5	14.5	4.2	0.019	10	8	3304 10 08	36	44	40.5	15.5
6	4	3304 06 04		24.5	34	37	11.5	4.2	0.015																																		
	8	3304 08 04	24.5	34	37	11.5	4.2	0.012																																			
8	6	3304 08 06	24.5	34	37	11.5	4.2	0.010																																			
	10	3304 10 06	36	44	40.5	14.5	4.2	0.019																																			
10	8	3304 10 08	36	44	40.5	15.5	4.2	0.015																																			

3306 90° Multiple Elbow

	<p>Technical polymer, NBR</p> 	<p>ØD1 ØD2 </p>	<p>G G1 H L/2 N N1 ØT kg</p>																																																		
		<table border="1"> <tr> <td rowspan="2">6</td> <td>4</td> <td>3306 06 04</td> <td>13.5</td> <td>11</td> <td>18.5</td> <td>36</td> <td>43</td> <td>11.5</td> <td>4.2</td> <td>0.034</td> </tr> <tr> <td>8</td> <td>3306 08 04</td> <td>13.5</td> <td>11</td> <td>18.5</td> <td>36.5</td> <td>43</td> <td>11.5</td> <td>4.2</td> <td>0.025</td> </tr> <tr> <td rowspan="2">8</td> <td>6</td> <td>3306 08 06</td> <td>13.5</td> <td>11</td> <td>18.5</td> <td>36.5</td> <td>43</td> <td>11.5</td> <td>4.2</td> <td>0.022</td> </tr> <tr> <td>10</td> <td>3306 10 06</td> <td>16</td> <td>13.5</td> <td>23</td> <td>42</td> <td>52</td> <td>14.5</td> <td>4.2</td> <td>0.048</td> </tr> <tr> <td>10</td> <td>8</td> <td>3306 10 08</td> <td>16</td> <td>13.5</td> <td>23.5</td> <td>42</td> <td>52</td> <td>14.5</td> <td>4.2</td> <td>0.036</td> </tr> </table>	6	4	3306 06 04	13.5	11	18.5	36	43	11.5	4.2	0.034	8	3306 08 04	13.5	11	18.5	36.5	43	11.5	4.2	0.025	8	6	3306 08 06	13.5	11	18.5	36.5	43	11.5	4.2	0.022	10	3306 10 06	16	13.5	23	42	52	14.5	4.2	0.048	10	8	3306 10 08	16	13.5	23.5	42	52	14.5
6	4	3306 06 04		13.5	11	18.5	36	43	11.5	4.2	0.034																																										
	8	3306 08 04	13.5	11	18.5	36.5	43	11.5	4.2	0.025																																											
8	6	3306 08 06	13.5	11	18.5	36.5	43	11.5	4.2	0.022																																											
	10	3306 10 06	16	13.5	23	42	52	14.5	4.2	0.048																																											
10	8	3306 10 08	16	13.5	23.5	42	52	14.5	4.2	0.036																																											

3310 In-Line Manifold

	<p>Treated aluminium, NBR</p> 	<p>ØD C </p>	<p>Number of Outlets E H L L1 N kg</p>																																															
		<table border="1"> <tr> <td>4</td> <td>G1/4</td> <td>3310 04 13</td> <td>8</td> <td>10</td> <td>33</td> <td>114</td> <td>104</td> <td>11.5</td> <td>0.175</td> </tr> <tr> <td>6</td> <td>G1/4</td> <td>3310 06 13</td> <td>8</td> <td>10</td> <td>33</td> <td>114</td> <td>104</td> <td>12.5</td> <td>0.170</td> </tr> <tr> <td>8</td> <td>G3/8</td> <td>3310 08 17</td> <td>6</td> <td>12</td> <td>33</td> <td>114</td> <td>104</td> <td>15</td> <td>0.157</td> </tr> <tr> <td>10</td> <td>G1/2</td> <td>3310 10 21</td> <td>6</td> <td>16</td> <td>48</td> <td>145.5</td> <td>135.5</td> <td>17</td> <td>0.348</td> </tr> <tr> <td>12</td> <td>G1/2</td> <td>3310 12 21</td> <td>6</td> <td>16</td> <td>45</td> <td>158</td> <td>148</td> <td>20.5</td> <td>0.370</td> </tr> </table>	4	G1/4	3310 04 13	8	10	33	114	104	11.5	0.175	6	G1/4	3310 06 13	8	10	33	114	104	12.5	0.170	8	G3/8	3310 08 17	6	12	33	114	104	15	0.157	10	G1/2	3310 10 21	6	16	48	145.5	135.5	17	0.348	12	G1/2	3310 12 21	6	16	45	158	148
4	G1/4	3310 04 13	8	10	33	114	104	11.5	0.175																																									
6	G1/4	3310 06 13	8	10	33	114	104	12.5	0.170																																									
8	G3/8	3310 08 17	6	12	33	114	104	15	0.157																																									
10	G1/2	3310 10 21	6	16	48	145.5	135.5	17	0.348																																									
12	G1/2	3310 12 21	6	16	45	158	148	20.5	0.370																																									