

# LF 3000® Push-In Fittings

The LF 3000® range, with its wide variety of shapes and configurations, allows you to find **the perfect product to meet your needs** and thus **optimise the use** of your equipment.

## Product Advantages

### World-Class Performance

- 40 years of expertise
- Full bore for optimum flow
- Ideal for vacuum or pressure applications
- Automatic sealing guaranteed, in both static and dynamic applications
- Materials with high resistance
- Durability of product and equipment

### Optimal Design

- 100% leak-tested in production
- Date coding to guarantee quality and traceability
- Compact and aesthetic design: reduced dimensions for space-saving
- Tube fixed during connection, preventing leakage
- Conforms to ISO 14743
- Excellent vacuum performance thanks to the patented sealing technology
- Lightweight: reduced energy consumption of operating systems
- Parallel threaded fitting with a patented captive O-ring seal
- Maximum flexibility due to the wide product range



- Robotics
- Automotive Process
- Pneumatics
- Semi-Conductors
- Textile
- Packaging
- Vacuum

Applications


## Technical Characteristics

<b>Compatible Fluids</b>	Compressed air Other fluids: please consult us
<b>Working Pressure</b>	Vacuum to 20 bar
<b>Working Temperature</b>	-20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.  
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

### Component Materials

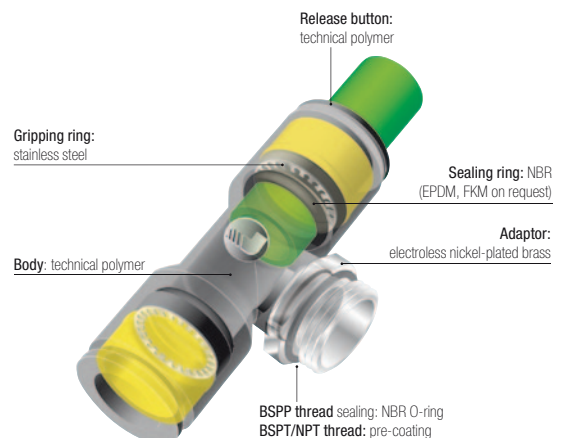

### Silicone-free

### Regulations

ISO 14743: Pneumatic fluid power, push-in connectors for thermoplastic tubes  
DI: 97/23/EC (PED)


DI: 2002/95/EC (RoHS), 2011/65/EC  
DI: 1907/2006 (REACH)

# Stud Fittings

## 3169 Extended Stud Elbow, Male BSPP and Metric Thread



Technical polymer, nickel-plated brass, NBR




ØD	C		E	F	G	H	L	kg
4	M5x0.8	<a href="#">3169 04 19</a>	3.5	8	8.5	23	19	0.005
	M7x1	<a href="#">3169 04 55</a>	4.5	10	8.5	22.5	19	0.008
	G1/8	<a href="#">3169 04 10</a>	5	13	8.5	22.5	19	0.009
	G1/4	<a href="#">3169 04 13</a>	5.5	16	8.5	22.5	19	0.014
6	M5x0.8	<a href="#">3169 06 19</a>	3.5	10	10.5	27.5	23	0.008
	M7x1	<a href="#">3169 06 55</a>	4.5	10	10.5	26	23	0.012
	G1/8	<a href="#">3169 06 10</a>	5	13	10.5	27	23	0.011
	G1/4	<a href="#">3169 06 13</a>	5.5	16	10.5	27	23	0.016
8	G1/8	<a href="#">3169 08 10</a>	5	13	13.5	36	29.5	0.018
	G1/4	<a href="#">3169 08 13</a>	5.5	16	13.5	33	29.5	0.020
	G3/8	<a href="#">3169 08 17</a>	5.5	20	13.5	33	29.5	0.028
10	G1/4	<a href="#">3169 10 13</a>	5.5	16	16	40.5	34.5	0.029
	G3/8	<a href="#">3169 10 17</a>	5.5	20	16	40.5	34.5	0.037
12	G1/2	<a href="#">3169 12 21</a>	7.5	24	16	40.5	34.5	0.042
	G1/4	<a href="#">3169 12 13</a>	5.5	19	19	44.5	40.5	0.049
14	G3/8	<a href="#">3169 14 17</a>	5.5	20	19	42	40.5	0.040
	G1/2	<a href="#">3169 12 21</a>	7.5	24	19	42	40.5	0.049
	G3/8	<a href="#">3169 14 17</a>	5.5	22	22	51	46.5	0.059
16	G1/2	<a href="#">3169 14 21</a>	7.5	24	22	48.5	46.5	0.063
	G3/8	<a href="#">3169 16 17</a>	7.5	27	27	82.5	52	0.220
	G1/2	<a href="#">3169 16 21</a>	9	27	27	82.5	52	0.206

The body swivels for positioning purposes.

## 3113 45° Elbow, Male BSPT Thread



Technical polymer, nickel-plated brass, NBR




ØD	C		F	G	H	L	kg
4	R1/8	<a href="#">3113 04 10</a>	10	9	21	13	0.006
6	R1/8	<a href="#">3113 06 10</a>	10	11	24.5	14.5	0.006
	R1/4	<a href="#">3113 06 13</a>	14	11	25	14.5	0.015
8	R1/8	<a href="#">3113 08 10</a>	10	13.5	30	19.5	0.008
	R1/4	<a href="#">3113 08 13</a>	14	13.5	28.5	19.5	0.015
	R3/8	<a href="#">3113 08 17</a>	17	13.5	28.5	19.5	0.020
10	R1/4	<a href="#">3113 10 13</a>	15	16	33.5	23	0.014
	R3/8	<a href="#">3113 10 17</a>	17	16	33.5	23	0.019
	R1/2	<a href="#">3113 10 21</a>	21	16	34	23	0.100
12	R1/4	<a href="#">3113 12 13</a>	15	19	39	26	0.016
	R3/8	<a href="#">3113 12 17</a>	17	19	39	26	0.022
	R1/2	<a href="#">3113 12 21</a>	21	19	39	26	0.040

Pre-coated thread  
The body swivels for positioning purposes.  
This model prevents distortion of the tube.

## 3133 45° Elbow, Male BSPP and Metric Thread



Technical polymer, nickel-plated brass, NBR



ØD	C		E	F	G	H	L	kg
4	M5x0.8	<a href="#">3133 04 19</a>	3.5	8	9	23	13	0.003
	G1/8	<a href="#">3133 04 10</a>	4.5	13	9	20.5	13	0.006
6	M5x0.8	<a href="#">3133 06 19</a>	3.5	8	11	28	14.5	0.003
	G1/8	<a href="#">3133 06 10</a>	4.5	13	11	24	14.5	0.006
	G1/4	<a href="#">3133 06 13</a>	5.5	16	11	24	14.5	0.011
8	G1/8	<a href="#">3133 08 10</a>	4.5	13	13.5	31	19.5	0.011
	G1/4	<a href="#">3133 08 13</a>	5.5	16	13.5	29	19.5	0.012
	G3/8	<a href="#">3133 08 17</a>	5.5	20	13.5	29	19.5	0.020
10	G1/4	<a href="#">3133 10 13</a>	5.5	16	16	35	23	0.014
	G3/8	<a href="#">3133 10 17</a>	5.5	20	16	33.5	23	0.017
	G1/2	<a href="#">3133 10 21</a>	7	24	16	33.5	23	0.026
12	G1/4	<a href="#">3133 12 13</a>	5.5	16	19	40.5	26	0.016
	G3/8	<a href="#">3133 12 17</a>	5.5	20	19	39	26	0.019
	G1/2	<a href="#">3133 12 21</a>	7	24	19	39	26	0.028

The body swivels for positioning purposes.  
This model prevents distortion of the tube.