



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS331W


Parker Part No: 937202Q

OEM: Pall

OEM Part No: HC9604FKS16H&Z

			•		
\boldsymbol{u}	raa		 ıma	nsio	ne
	100	ıucı	 HIIC	HOIL	шъ

A (mm)	79.0	(inch)	3.11
B (mm)	51.0	(inch)	2.01
D (mm)	79.0	(inch)	3.11
E (mm)	421.0	(inch)	16.57
H (mm)	16.0	(inch)	0.63

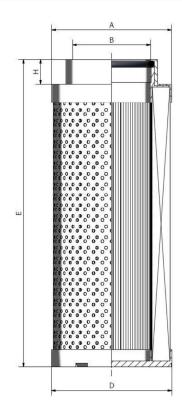



Construction Materials

Seal(s):	FPM: Fluoroelastomer		
Top Endcap:	Glass reinforced nylon		
Bottom Endcap:	Glass reinforced nylon		
Filter Media:	Multilayer fibreglass with coated mesh on both sides		

Calculated Performance Criteria

Differential Pressure (△p): 0.37 bar @ 500 l/min **Tested to ISO3968 @ 32 cSt** 5.31 psi @ 109.98 gp

Efficiency: >Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >10 bar Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889

69.0 gram @ 4 bar terminal pressure drop 69.0 gram @ 58 psi terminal pressure drop

