

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS658W


Parker Part No: 938260Q

OEM: Hydac

OEM Part No: 0060R020BN4HC

Product Dimensions

A (mm)	51.5	(inch)	2.03
C (mm)	22.2	(inch)	0.87
D (mm)	51.5	(inch)	2.03
E (mm)	103.0	(inch)	4.06
G (mm)	24.0	(inch)	0.94
H (mm)	10.5	(inch)	0.41

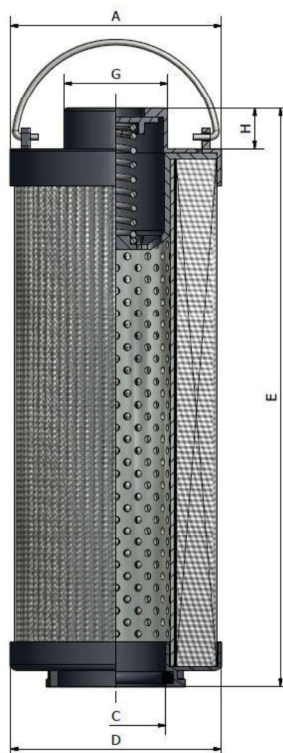

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Glass reinforced nylon
Bottom Endcap:	Glass reinforced nylon
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp): 0.40 bar @ 30 l/min
Tested to ISO3968 @ 32 cSt 5.80 psi @ 6.60 gpm

Efficiency: >Beta 200 @ 20 microns & greater
 >Beta 1000 @ 22 microns & greater

Minimum Collapse Pressure: >20 bar
Tested to ISO2941 >290 psi

Dirt Holding Capacity acc. to ISO16889

3.7 gram @ 4 bar terminal pressure drop
 3.7 gram @ 58 psi terminal pressure drop