



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS1038W


Parker Part No: 943722Q

OEM: MP Filtri

OEM Part No: MF1801A25HV&B

Product Dimensions

A (mm)	99.0	(inch)	3.90
C (mm)	40.5	(inch)	1.59
D (mm)	99.0	(inch)	3.90
E (mm)	216.0	(inch)	8.50

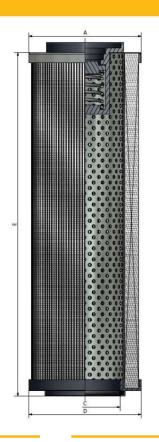



Construction Materials

Seal(s):	FPM: Fluoroelastomer	
Top Endcap:	Glass reinforced nylon	
Bottom Endcap:	Glass reinforced nylon	
Inner Support Cylinder:	Mild steel tin plated	
Filter Media:	Multilayer fibreglass with coated mesh on both sides	

Calculated Performance Criteria

Differential Pressure (△p): 0.35 bar @ 300 l/min **Tested to ISO3968 @ 32 cSt** 5.08 psi @ 65.99 gpm

Efficiency: >Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater

Minimum Collapse Pressure: >10 bar Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889

>21.1 gram @ 4 bar terminal pressure drop >21.1 gram @ 58 psi terminal pressure drop

