

3/2


VALVES FOR DRY OR LUBRICATED AIR, NEUTRAL GASES AND LIQUIDS

PILOT OPERATED

ANODIZED ALUMINIUM

PIPE MOUNTING

NORMALLY OPEN



Port size	Orifice Ø		Flow factors			Operating Pressure Differential			Fluid Temp.		Seat Seal				Power		Coil Group	Dwg. No.	
	1	(2)	1	(2)	1	(2)	Min	Max (MOPD)	Min	Max		Valve Ref.	Housing Ref.	Coil Ref.	AC W	DC W			
BSP	mm		Kv l/min		Q l/min		bar	AC bar	DC bar	°C	°C								
1/2"	14	14	37.5	-	2500	2500	1	15	15	-10	75	NBR	E332B21 ₁	2995	481865	8	9	2.1	3238
	14	14	37.5	-	2500	2500	1	15	15	-10	75	NBR	E332B21 ₁	4270	481000	8	8	2.1	3238


Notes:

- 1.Valve only compatible with air and neutral gases
- 2.With manual override

ANODIZED ALUMINIUM

SUB-BASE MOUNTING

NORMALLY CLOSED




Port size	Orifice Ø	Flow factor	Operating Pressure Differential			Fluid Temp.		Seat Seal				Power		Coil Group	Dwg. No.
	1		Min	Max (MOPD)	Min	Max	Valve Ref.		Housing Ref.	Coil Ref.	AC W	DC W			
	mm	Qn l/min	bar	AC bar	DC bar	°C		°C							
SB	15	5000	0.5	10	10	-10	75	NBR	E331L21 ₁₂	2995	481865	8	9	2.1/3.0	3130
	15	5000	0.5	10	10	-10	65	NBR	E331L21 ₁₂	-	483371	8	8	2.1/3.0	3130

Notes:


- 1.Valve only compatible with air and neutral gases
- 2.With manual override





For this page	Port size	Orifice (mm)	Qn (l/min)	MOPD (bar)	Fluid Temp (°C)
From	1/2"	14	-	10	-10
To	1/2"	15	5000	15	75

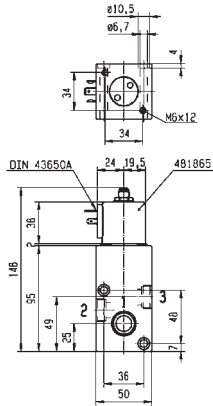

Weight: 0.98 ka



Drawing 3238

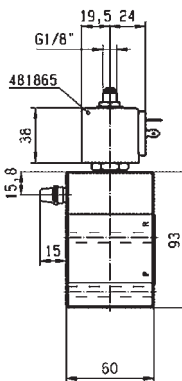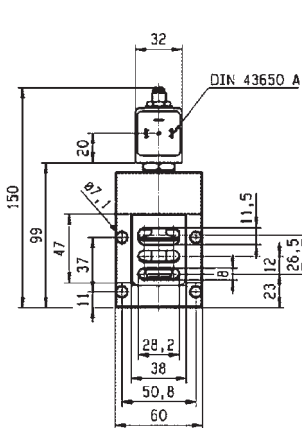

Drawing 3130