


## Adapters

### EMK4 Union elbow


BSPP 60° Cone end (ISO 8434-6)



Thread BSPP T4	D mm	L mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar)	
							S	SS
1/8	4	17	11	21	<b>2EMK4S</b>	<b>2EMK4SS</b>	350	350
1/4	5	24	14	45	<b>4EMK4S</b>	<b>4EMK4SS</b>	350	350
3/8	8	27	19	85	<b>6EMK4S</b>	<b>6EMK4SS</b>	350	350
1/2	11	32	22	123	<b>8EMK4S</b>	<b>8EMK4SS</b>	200	200
5/8	14	34	22	109	<b>10EMK4S</b>	<b>10EMK4SS</b>	200	200
3/4	17	36	27	178	<b>12EMK4S</b>	<b>12EMK4SS</b>	200	200
1	22	42	33	288	<b>16EMK4S</b>	<b>16EMK4SS</b>	120	120
1 1/4	29	48	41	512	<b>20EMK4S</b>	<b>20EMK4SS</b>	105	105
1 1/2	33	54	48	824	<b>24EMK4S</b>	<b>24EMK4SS</b>	105	105

### JMK4 Union tee

BSPP 60° Cone end (ISO 8434-6)

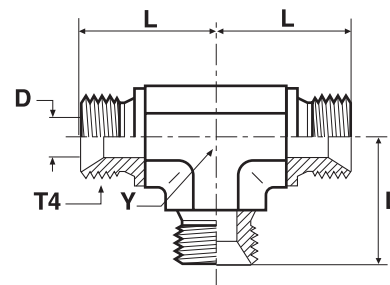

Thread BSPP T4	D mm	L mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar)	
							S	SS
1/8	4	17	11	33	<b>2JMK4S</b>	<b>2JMK4SS</b>	350	350
1/4	5	24	14	61	<b>4JMK4S</b>	<b>4JMK4SS</b>	350	350
3/8	8	27	19	105	<b>6JMK4S</b>	<b>6JMK4SS</b>	350	350
1/2	11	32	22	157	<b>8JMK4S</b>	<b>8JMK4SS</b>	200	200
5/8	14	34	22	145	<b>10JMK4S</b>	<b>10JMK4SS</b>	200	200
3/4	17	36	27	258	<b>12JMK4S</b>	<b>12JMK4SS</b>	200	200
1	22	42	33	591	<b>16JMK4S</b>	<b>16JMK4SS</b>	120	120
1 1/4	29	48	41	646	<b>20JMK4S</b>	<b>20JMK4SS</b>	105	105
1 1/2	33	54	48	940	<b>24JMK4S</b>	<b>24JMK4SS</b>	105	105

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Pressure ratings – PN shown, apply to Steel and Stainless Steel versions of the product.