

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS157W


Parker Part No: 927182Q

OEM: Pall

OEM Part No: HC9601FDP13H&Z

Product Dimensions

A (mm)	79.0	(inch)	3.11
B (mm)	43.4	(inch)	1.71
D (mm)	79.0	(inch)	3.11
E (mm)	329.0	(inch)	12.95

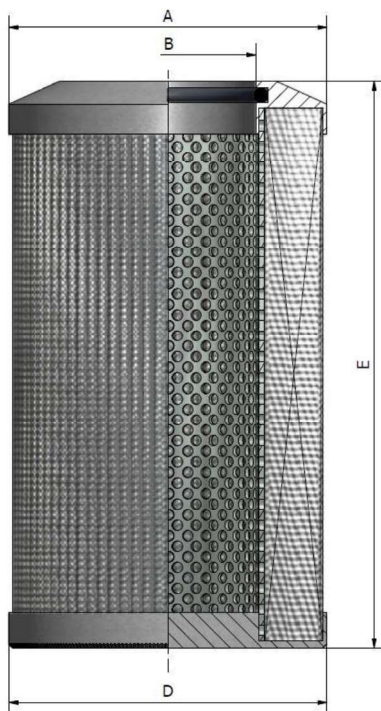

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Steel tin plated
Bottom Endcap:	Steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on the inflow side and stainless steel mesh on the outlet side

Calculated Performance Criteria

Differential Pressure (Δp): 0.48 bar @ 250 l/min
Tested to ISO3968 @ 32 cSt 6.96 psi @ 54.99 gpm

Efficiency: >Beta 200 @ N/A microns & greater
 >Beta 1000 @ 4.5 microns & greater

Minimum Collapse Pressure: >210 bar
Tested to ISO2941 >3046 psi

Dirt Holding Capacity acc. to ISO16889
 69.0 gram @ 7 bar terminal pressure drop
 69.0 gram @ 102 psi terminal pressure drop