

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS993W


Parker Part No: 943944Q

OEM: MP Filtri

OEM Part No: MR6302A10V&A

Product Dimensions

A (mm)	126.0	(inch)	4.96
B (mm)	92.0	(inch)	3.62
C (mm)	10.2	(inch)	0.40
D (mm)	126.0	(inch)	4.96
E (mm)	290.0	(inch)	11.42

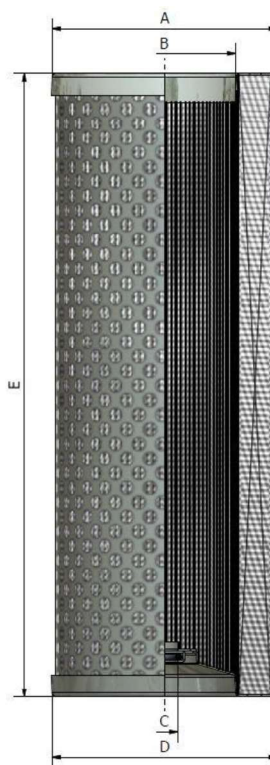

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Outer Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp): 0.40 bar @ 500 l/min
Tested to ISO3968 @ 32 cSt 5.80 psi @ 109.98 gp

Efficiency: >Beta 200 @ 10 microns & greater
 >Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >10 bar
Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889
 >41.7 gram @ 4 bar terminal pressure drop
 >41.7 gram @ 58 psi terminal pressure drop