


## ROV Blanking plug for tube ends

EO 24°cone end

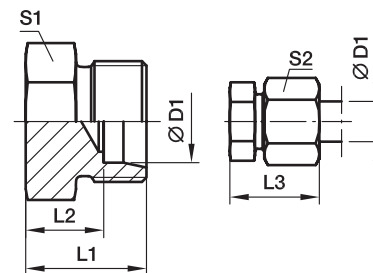

| Series          | D1<br> | L1 | L2   | L3 | S1 | S2 | Weight<br>g/1 piece | Order code* | PN (bar) <sup>1)</sup> |     |
|-----------------|-----------------------------------------------------------------------------------------|----|------|----|----|----|---------------------|-------------|------------------------|-----|
|                 |                                                                                         |    |      |    |    |    |                     |             | CF                     | 71  |
| L <sup>3)</sup> | 06                                                                                      | 14 | 7.0  | 22 | 12 | 14 | 8                   | ROV06L      | 315                    | 315 |
|                 | 08                                                                                      | 15 | 8.0  | 23 | 14 | 17 | 13                  | ROV08L      | 315                    | 315 |
|                 | 10                                                                                      | 16 | 9.0  | 24 | 17 | 19 | 17                  | ROV10L      | 315                    | 315 |
|                 | 12                                                                                      | 17 | 10.0 | 25 | 19 | 22 | 24                  | ROV12L      | 315                    | 315 |
|                 | 15                                                                                      | 18 | 11.0 | 26 | 24 | 27 | 41                  | ROV15L      | 315                    | 315 |
|                 | 18                                                                                      | 19 | 11.5 | 28 | 27 | 32 | 56                  | ROV18L      | 315                    | 315 |
|                 | 22                                                                                      | 21 | 13.5 | 30 | 32 | 36 | 84                  | ROV22L      | 160                    | 160 |
|                 | 28                                                                                      | 22 | 14.5 | 31 | 41 | 41 | 138                 | ROV28L      | 160                    | 160 |
|                 | 35                                                                                      | 25 | 14.5 | 36 | 46 | 50 | 203                 | ROV35L      | 160                    | 160 |
|                 | 42                                                                                      | 27 | 16.0 | 39 | 55 | 60 | 318                 | ROV42L      | 160                    | 160 |
|                 | 06                                                                                      | 18 | 11.0 | 26 | 14 | 17 | 17                  | ROV06S      | 630                    | 630 |
|                 | 08                                                                                      | 20 | 13.0 | 28 | 17 | 19 | 28                  | ROV08S      | 630                    | 630 |
|                 | 10                                                                                      | 20 | 12.5 | 29 | 19 | 22 | 33                  | ROV10S      | 630                    | 630 |
|                 | 12                                                                                      | 22 | 14.5 | 31 | 22 | 24 | 50                  | ROV12S      | 630                    | 630 |
| S <sup>4)</sup> | 14                                                                                      | 24 | 16.0 | 34 | 24 | 27 | 62                  | ROV14S      | 630                    | 630 |
|                 | 16                                                                                      | 24 | 15.5 | 34 | 27 | 30 | 75                  | ROV16S      | 400                    | 400 |
|                 | 20                                                                                      | 28 | 17.5 | 39 | 32 | 36 | 125                 | ROV20S      | 400                    | 400 |
|                 | 25                                                                                      | 32 | 20.0 | 44 | 41 | 46 | 229                 | ROV25S      | 400                    | 400 |
|                 | 30                                                                                      | 34 | 20.5 | 47 | 46 | 50 | 310                 | ROV30S      | 400                    | 400 |
|                 | 38                                                                                      | 39 | 23.0 | 54 | 55 | 60 | 508                 | ROV38S      | 315                    | 315 |

<sup>1)</sup> Pressure shown = item deliverable<sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series
$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Delivery without nut and ring. Information on ordering complete fittings see page 17.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes             |                             |           |
|---------------------------------|-----------------------------|-----------|
| Material                        | Suffix surface and material | Example   |
| Steel, zinc plated, Cr(VI)-free | CFX                         | ROV16SCFX |
| Stainless Steel                 | 71X                         | ROV16S71X |